

PUPPY TEETER ASSEMBLY


YOUR TEETER COMES IN 1 BOX
CONTAINING TEETER BASE ,PLANK ASSEMBLY
PLATFORM AND
2 HALF SECTIONS OF THE TEETER SURFACE

SEPARATE THE TEETER BASE **A** FROM THE
PLANK ASSEMBLY PLATFORM **B**

ASSEMBLE THE TEETER BASE **A**
BY LINING UP THE HOLES ON THE TWO SETS
OF ARMS AND INSERTING THE
SCREWS **C**



IF YOU FIND IT DIFFICULT TO LINE UP THE HOLES
USE GROUND ANCHORS
TO HELP HOLD THE HOLES IN POSITION UNTIL
THE SCREWS CAN BE INSERTED.

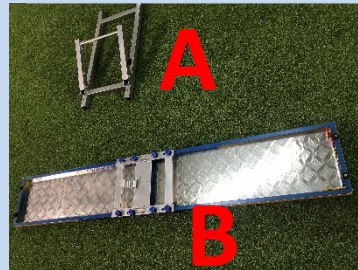

PLACE THE TEETER SURFACES UPSIDE DOWN
WITH THE BLUE SECTIONS IN THE MIDDLE
PLACE THE ASSEMBLY PLATFORM B OVER
THE TEETER SURFACES AND LINE UP THE
HOLES.

ASSEMBLE WITH SCREWS **D** PROVIDED
**Hand tighten only there are slots
Which allow the teeters balance to be
adjusted to suit your taste**
**You can add extra weight to one end by
placing magnets on the undersides of the
frame**

Place the assembled frame on the teeter
surface and connect using the washer and
wing nut **E** provided



THE TEETER SURFACE IS ATTACHED TO THE BASE USING THE WING NUT **E**