



TECHNICAL DATA SHEET
SUPER LUBE® GROMMET LUBE

May 2018

PRODUCT DESCRIPTION:

Super Lube® Grommet Lube is an aqueous polymeric solution that is non-flammable, has a wide operating temperature range, low coefficient of friction and dries clean.

Super Lube® Grommet Lube offers superior temporary lubrication and will not leave any residue.

Super Lube® Grommet Lube will assist in the attachment and insertion of rubber and soft plastic parts where there is a tight fit.




FEATURES:

- ❖ Eases component insertion
- ❖ Dries clean
- ❖ Speeds assembly
- ❖ Compatible with most plastic and rubber components
- ❖ Provides superior friction reduction
- ❖ Non-Flammable
- ❖ Environmentally friendly
- ❖ Biodegradable

TYPICAL APPLICATIONS:

- ❖ Grommets and sleeves
- ❖ O-rings, boots and diaphragms
- ❖ Tires, hoses and seals
- ❖ Bushings, plugs and belts

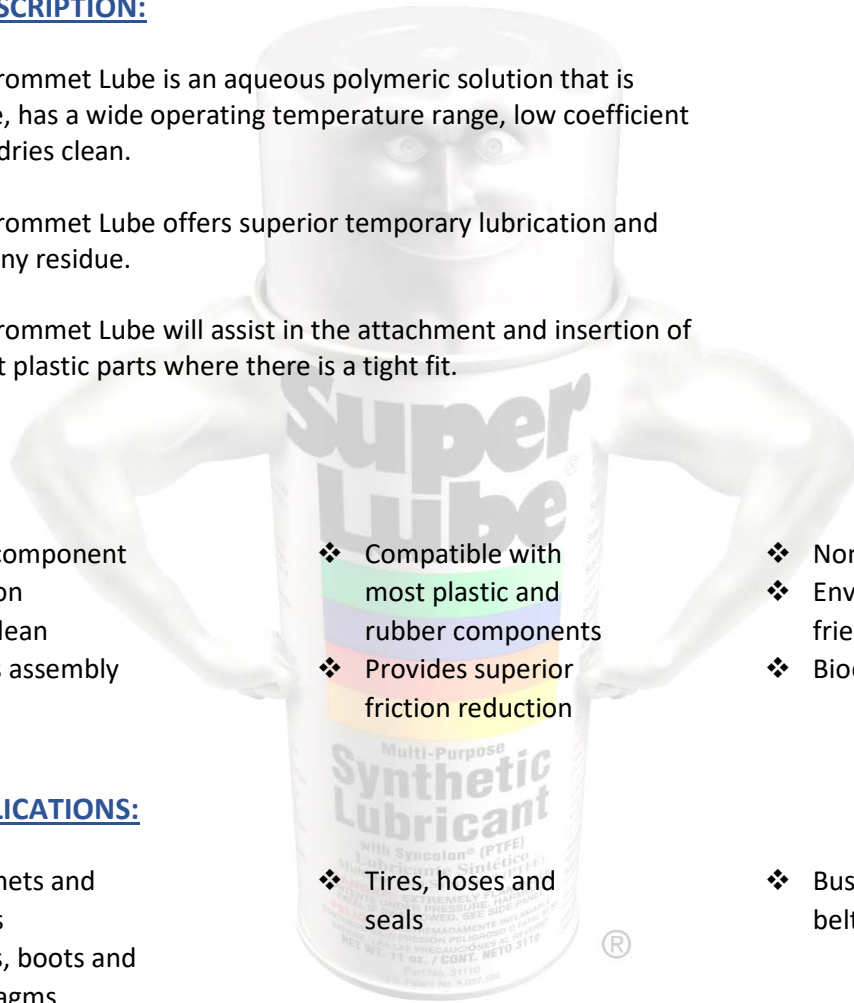

PACKAGE SIZES:

Part No.	Description
81050	5 Gallon Pail
81055	55 Gallon Drum



TECHNICAL DATA SHEET
SUPER LUBE® GROMMET LUBE

May 2018

PROPERTIES:

Test	Test Method	Rating
Color:		Translucent
Temperature Range:		-15°F to 220°F (-26°C to 104°C)
Viscosity:	ASTM D445	66 – 100 cSt
Flammability:		Non-flammable
pH of material:		6.5-7.5
Coefficient of friction		
a) Static:		0.0140
b) Dynamic:		0.096
Biodegradability:	CEC-L33-T82	50% degradability in 28-35 days 60+% degradability in 56 days

DIRECTIONS:

- Clean and dry area to be treated.
- Apply lube.
- Assemble.
- Remove excess.

SHELF LIFE / WARRANTY:

Super Lube® products have a five (5) year recommended shelf life when stored in the original container and in reasonable ambient conditions. The warranty period is twenty-four (24) months from the date of purchase. For complete information visit www.super-lube.com/what-is-the-shelf-life-ezp-320.html.



See Safety Data Sheet (SDS) for further details regarding safe use of this product.



Made in USA

The information provided in this Technical Data Sheet including the recommendations for use and application of the product are based on our knowledge and experience of the product as of the date of this data sheet. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Synco Chemical Corporation is, therefore not liable for the suitability of our product for the production processes and conditions in respect for which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

All Super Lube® trademarks in this document are trademarks of Synco Chemical Corporation.